

AYASOFYA
ENERJİ

ÜRÜN ÖZELLİKLERİ (PRODUCT FEATURES)

Ürün Adı Product Name	Voltaj Voltage	LED Miktarı LED Qty (LED/mt)	Lümen Lumen	Watt Watts	Uzunluk Length
LN54USP70	24V DC	70	540 Lm	4.8* W	100 cm
LN54USP70	24V DC	70	864 Lm	7.2* W	100 cm
LN54USP70	24V DC	70	1.200 Lm	10* W	100 cm
LN54USP70	24V DC	70	1.728 Lm	14.4* W	100 cm
LN54USP70	24V DC	70	2.400-4320 Lm	20-36* W	100 cm
LN54U RGB60	24V DC	60	1 px/mt	4.5-14.4 W	100 cm
LN54U DMX36MN	24V DC	36	6 px/mt	4.5-14.4 W	100 cm
LN54U DMX36TNB	24V DC	72	6 px/mt	4.5-14.4 W	100 cm
LN54U DMX36RGB	24V DC	36	6 px/mt	4.5-14.4 W	100 cm
LN54U DMX36RGBW	24V DC	72	6 px/mt	4.5-14.4 W	100 cm

*Ürünler standart olarak 14.4 W olarak üretilmektedir. Talep üzerine belirli aralıklarda üretilebilir
Products are produced as 14.4 W as standard. It can be produced in specific intervals upon request.

OPSİYONEL ÖZELLİKLER (OPTIONAL FEATURES)

RENK (COLOR)



IŞIK AÇISI (LIGHT ANGLE)

120 °


CONTROL SİSTEMLERİ (CONTROL SYSTEMS)



POLİMER (POLYMER)




KESİM ARALIĞI (CUTTING RANGE)

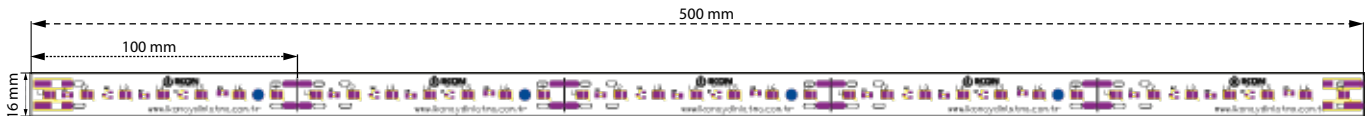

MONTAJ (MOUNTING)

Montaj Seçenekleri Mounting Options

- 1) Vida M3.9 / Screw M3.9 (Recommended)
- 2) Çift Taraflı Bant / Double-sided Tape
- 3) Silikon / Silicon

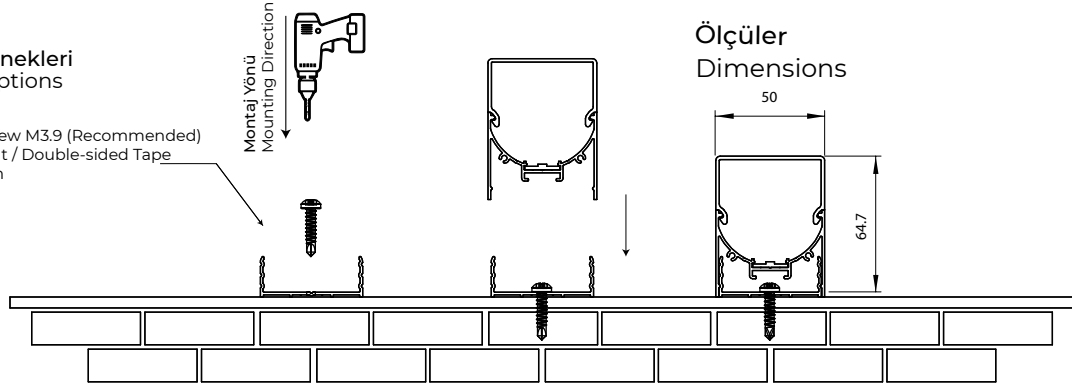

AKSESUARLAR (ACCESSORY)



PCB Con.



IP20 Con.



IP67 Soket

KULLANIM ALANLARI (AREAS OF USAGE)



Dekoratif Aydınlatma
Decorative Lighting



İç Mekan Aydınlatma
Indoor Lighting



İç Mekan Aydınlatma
Indoor Lighting



Dekoratif Aydınlatma
Decorative Lighting