



AYASOFYA
ENERJİ

ÜRÜN ÖZELLİKLERİ (PRODUCT FEATURES)

Ürün Adı Product Name	Voltaj Voltage	LED Miktarı LED Qty (LED/mt)	Lümen Lumen	Watt Watts	Uzunluk Length
LN22SP70	24V DC	70	540 Lm	4.8* W	100 cm
LN22SP70	24V DC	70	864 Lm	7.2* W	100 cm
LN22SP70	24V DC	70	1.200 Lm	10* W	100 cm
LN22SP70	24V DC	70	1.728 Lm	14.4* W	100 cm
LN22SP70	24V DC	70	2.400-3.200 Lm	20-26* W	100 cm
LN22 RGB60	24V DC	60	1 px/mt	4.5-14.4 W	100 cm
LN22 DMX36MN	24V DC	36	6 px/mt	4.5-14.4 W	100 cm
LN22 DMX36TNB	24V DC	72	6 px/mt	4.5-14.4 W	100 cm
LN22 DMX36RGB	24V DC	36	6 px/mt	4.5-14.4 W	100 cm
LN22 DMX36RGBW	24V DC	72	6 px/mt	4.5-14.4 W	100 cm

*Ürünler standart olarak 14.4 W olarak üretilmektedir. Talep üzerine belirli aralıklarda üretilebilir
Products are produced as 14.4 W as standard. It can be produced in specific intervals upon request.

OPSİYONEL ÖZELLİKLER (OPTIONAL FEATURES)

RENK (COLOR)



İŞIK AÇISI (LIGHT ANGLE)

120 °


CONTROL SİSTEMLERİ (CONTROL SYSTEMS)



POLİMER (POLYMER)




KESİM ARALIĞI (CUTTING RANGE)



MONTAJ (MOUNTING)

Montaj Seçenekleri Mounting Options

- 1) Vida M3.9 / Screw M3.9 (Recommended)
- 2) Çift Taraflı Bant / Double-sided Tape
- 3) Silikon / Silicon

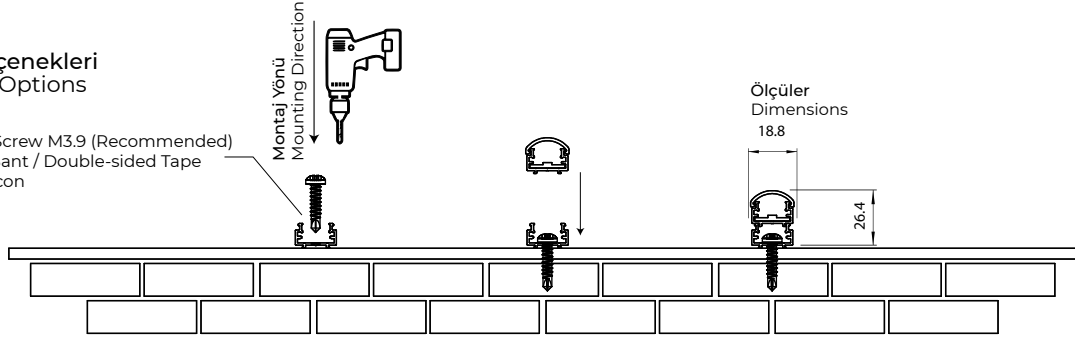

AKSESUARLAR (ACCESSORY)



PCB Con.



IP20 Con.



IP67 Soket

KULLANIM ALANLARI (AREAS OF USAGE)



Tavan Aydınlatma
Ceiling Lighting



Raf Aydınlatma
Shelf Lighting



Mutfak Aydınlatma
Kitchen Lighting



Çizgisel Aydınlatma
Linear Lighting